



Catalogue

CAD/CAM PRODUCTS

Valid from
November 2025

Contents

1

BEGO Security

05 BEGO Security Basic

2

Crown and Bridge Prosthetics

07 BEGO Zirkon ST/BEGO Zirkon ST Multi
08 BEGO Zirkon LT
10 VITA YZ®* ST^{Color}/VITA YZ® ST^{Multicolor}
11 VITA YZ® XT^{Color}/VITA YZ® XT^{Multicolor}
12 KATANA® Zirconia YML
13 KATANA Zirconia UTML
14 IPS e.max® CAD
15 VarseoSmile® Crown^{plus}
16 VarseoSmile® TriniQ®
18 BEGO PMMA Multicolor
20 Wirobond® C+
21 Wirobond® M+
22 BeCe® Cast
23 CAD/Cast®

3

CAD/CAM Implant Prosthetics

25 Individual Healing Posts
26 Individual Abutments
28 Occlusally Screw-Retained Bridges
30 Secondary Bar Structures
31 Bar Constructions
32 Bar Shapes

4

Partial Dentures

36 WIRONIUM® RP
37 WIRONIUM® RP Complete
38 WIRONIUM® RP Hybrid

5

CAD/CAM Double Crowns

40 CAD/CAM Double Crowns
41 Secondary Structures from Hybrid Production

6

Dentures

43 Digital Dentures

7

Splints

45 BEGO Splint E+
46 BEGO PMMA Splint E
47 BEGO PMMA Splint

8

Models

49 Model Production

9

Orthodontic Appliances

51 Orthodontic Appliances

10

Service

53 Order Options
54 BEGO CAD/CAM Tracking App
55 BEGO Further Education
56 General Information

WWW.BEGO.COM

* This symbol is a commercial designation/registered trademark of a company which is not part of the BEGO company group.

Detailed product information:



1

BEGO Security Basic



BEGO Security Basic

The free guarantee service

BEGO Security Basic

Type of restoration	Material		Duration	Service
"CAD/CAM Crowns and Bridges" module				
Crowns and bridges	Metal	Applies for CAD/CAM-produced crown and bridge frames made by BEGO	30 years	Free product replacement
	Ceramic		5 years	Free product replacement
"CAD/CAM Implant Prosthetics" module				
Abutments	Metal	Applies for one-piece abutments made of BEGO Titan Grade 5 as well as Wirobond® MI+ and M+	Lifetime	Free abutment replacement, poss. coverage of costs in case of screw fracture up to €1,200.00, poss. material costs of implant
	Zirconium dioxide		5 years	Free abutment replacement, poss. coverage of costs in case of screw fracture up to €1,200.00, poss. material costs of implant
Bars	Metal	Applies for bars made of BEGO Titan Grade 5 as well as Wirobond® MI+ and M+	Lifetime	Free bar replacement, poss. coverage of costs in case of screw fracture up to €1,200.00, poss. material costs of implant
Bridges	Metal	Applies for CAD/CAM-produced customized screw-retainable bridges	Lifetime	Free bridge replacement, poss. coverage of costs in case of screw fracture up to €1,200.00, poss. material costs of implant
"CAD/CAM Partial Denture" module				
Partial denture frameworks	Metal	Applies to CAD/CAM-produced partial denture frameworks WIRONIUM® RP made by BEGO	5 years	Free product replacement

Please do not hesitate to contact us in case of any questions concerning the process and/or our free BEGO Security Basic solutions.

For further questions concerning BEGO Security Basic

CAD/CAM Advice	Tel. +49 421 2028-200
	E-mail cadcam@bego.com



Do you know BEGO Security Plus?
More information:



Detailed product information:

Improved
recipe!

BEGO Zirkon ST / BEGO Zirkon ST Multi

Super translucent zirconium dioxide for large restorations

- Ultimate strength meets outstanding translucency
- Multicolor for outstanding prosthetics
- Shade match to the VITA* classical A-D shade ring thanks to pre-coloured material
- 16 VITA classical A-D shades
- Monochrome for full and partial veneers
- Multicolor for Micro Cut Back and monolithic restorations
- Bridge frames with up to 14 units and up to two adjacent pontics
- Implantat prosthetic abutments, monolithic abutment crowns and bridges

Product details

Chemical composition

Zirconium dioxide (ZrO ₂)	87–94%
Hafnium oxide (HfO ₂)	1–3%
Yttrium oxide (Y ₂ O ₃)	5–9%
Other oxides and pigments	0–1%

Technical specifications

3-point bending strength	1,200 MPa
Coefficient of thermal expansion	10,3 10 ⁻⁶ K ⁻¹
Translucency	46%
Sinter density	6.05 g/cm ³
Hardness	13 HV1
E-module	210 GPa

Indications

Fully anatomical crowns and bridges with up to 14 units and up to two pontics
Crowns and bridge frames for partially and fully veneered solutions with up to 14 units and up to two pontics
Dentin core crowns and bridges according to Josef Schwaiger (Patent: EP2363094B1 /DE102010002484B4)
CadAbut Duo (Two-piece abutments)
Telescopic primary crowns

* This symbol is a commercial designation/registered trademark of a company which is not part of the BEGO company group. Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.

2

Crown and Bridge Prosthetics

BEGO Zirkon ST / BEGO Zirkon ST Multi
 BEGO Zirkon LT
 VITA* YZ ST^{Color} / VITA YZ ST^{Multicolor}
 VITA YZ XT^{Color} / VITA YZ XT^{Multicolor}
 KATANA* Zirkonia YML
 KATANA Zirkonia UTML
 IPS e.max* CAD
 VarseoSmile[®] Crown^{plus}
 VarseoSmile[®] TriniQ[®]
 BEGO PMMA Multicolor
 Wirobond[®] C+
 Wirobond[®] M+
 BeCe[®] Cast
 CAD/Cast[®]

* This symbol is a commercial designation/registered trademark of a company which is not part of the BEGO company group.



BEGO Zirkon LT

Translucent zirconium dioxide for ceramic frames

- High level of shade fidelity thanks to the BEGO shade concept consisting of a total of five shades
- Consistent shade accuracy and reproducibility thanks to precolored blanks
- All-ceramic zirconium dioxide frame material for ceramic veneering

Technical data

Chemical composition

ZrO ₂ + HfO ₂ + Y ₂ O ₃	≥ 99.5% by weight
Yttrium oxide (Y ₂ O ₃)	5.2% by weight
Aluminum oxide (Al ₂ O ₃)	0.25% by weight
Other oxides	≤ 0.5% by weight

Physical material data

Density	6.08 g/cm ³
Biaxial strength	> 1,100 MPa
Vickers hardness (HV 1)	1,250 MPa
Translucency	35%
Coefficient of thermal expansion (RT – 600°C)	11.2 10 ⁻⁶ K ⁻¹

Shade overview BEGO Zirkon LT01–LT05



Correspondence of BEGO Zirkon LT01–LT05 to VITA* classical shade system

A1	A2	A3	A3,5	A4	B1	B2	B3	B4	C1	C2	C3	C4	D2	D3	D4
LT01	LT02	LT04	LT03	LT03	LT01	LT02	LT04	LT03	LT01	LT05	LT05	LT03	LT05	LT05	LT02

Product details

Indications

Frames for partially and fully veneered solutions with up to 16 units and up to two pontics
Two-piece abutments

Extra

Telescopic primary crowns





VITA YZ® ST Color / VITA YZ® ST Multicolor

The zirconium dioxide from the inventor of tooth shades, super translucent with best fidelity to the shade ring for all indications

- Latest generation Multicolor with original VITA* tooth shades
- Super translucent mono type with consistent highest flexural strength in all layers
- Pigmented incisal edge for natural dental aesthetics
- Original 16 VITA classical A–D shades VITA YZ® ST Color
- 4 layer Multicolor with flowing layer transition
- Original 16 VITA classical A–D shades für VITA YZ® ST Multicolor plus bleach color OM1
- Multicolour for monolithic restorations and microveneering
- Monochrome for full and partial veneers
- Bridge frames with up to 14 units and up to two adjacent pontics
- Implantat prosthetic abutments, monolithic abutment crowns and bridges

Product details

Chemical composition

Zirconium dioxide (ZrO ₂)	88–93%
Hafnium oxide (HfO ₂)	1–3%
Yttrium oxide (Y ₂ O ₃)	6–8%
Other oxides and pigments	0–1%

Technical specifications

3-point bending strength	1,200 MPa
Coefficient of thermal expansion	10.3 10 ⁻⁶ / K ⁻¹
Translucency	46%
Sinter Density	6.05 g/cm ³
Hardness	13 HV1
E-module	210 GPa

Indications

Fully anatomical crowns and bridges with up to 14 units and up to two pontics
Crowns and bridge frames for partially and fully veneered solutions with up to 14 units and up to two pontics
Dentin core crowns and bridges according to Josef Schwaiger (Patent: EP2363094B1 /DE102010002484B4)
CADAbut Duo (Two-piece abutments)
Telescopic primary crowns

* VITA and VITA YZ® ST Color / VITA YZ® ST Multicolor are commercial designations/registered trademarks of a company which is not part of the BEGO company group. Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.



VITA YZ® XT Color / VITA YZ® XT Multicolor

The zirconium dioxide from the inventor of tooth shades, extra translucent with best fidelity to the shade ring for aesthetics restoration in the anterior region

- Latest generation Multicolor with original VITA* tooth shades
- Extra translucent mono type with consistent high flexural strength in all layers
- Pigmented incisal edge for natural dental aesthetics
- 4 layer Multicolor with flowing layer transition
- Original 7 VITA classical A–D shades for VITA YZ® XT Multicolor: A1, A2, A3, A3.5, B2; C2, D2
- Original 16 VITA classical A–D shades for VITA YZ® XT Color
- Multicolor for monolithic restorations and microveneering
- Monochrome for full and partial veneers
- Bridge frames with up to 3 units with one pontic

Product details

Chemical composition

Zirconium dioxide (ZrO ₂)	86–91%
Hafnium oxide (HfO ₂)	1–3%
Yttrium oxide (Y ₂ O ₃)	8–10%
Other oxides and pigments	0–1%

Technical specifications

3-point bending strength	> 600 MPa
Coefficient of thermal expansion	10.0 10 ⁻⁶ / K ⁻¹
Translucency	50%
Sinter Density	6.03 g/cm ³
Hardness	13 HV1
E-module	210 GPa

Indications

Fully anatomical crowns and bridges with up to 3 units and up to one pontics
Fully and partially veneered crowns and bridges in the anterior region up to 3 units and up to one pontic
Dentin core crowns and bridges according to Josef Schwaiger (Patent: EP2363094B1 /DE102010002484B4)
Inlays, onlays, partial crowns and veneers

* VITA and VITA YZ® XT Color / VITA YZ® XT Multicolor are commercial designations/registered trademarks of a company which is not part of the BEGO company group. Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.



KATANA* Zirconia YML

The functional and aesthetic flagship of the Katana series with outstanding dental aesthetics and universal applicability

- Latest generation of type-layer zirconia with patented raw material technology
- Consistently highest flexural strength in the dentin and transfer area
- Optimum translucency with pigmented incisal layer for natural dental aesthetics
- 4 layer Multicolor with flowing layer transition
- Available in 13 VITA* classical shades A-D
- Multicolor for monolithic restorations and microveneering
- Bridge frames with up to 14 units and up to two adjacent pontics
- Implantat prosthetic abutments, monolithic abutment crowns and bridges

Product details

Chemical composition

Zirconium dioxide (ZrO ₂) & Hafnium oxide (HfO ₂)	87–95 %
Yttrium oxide (Y ₂ O ₃)	5–10 %
Other oxides and pigments	0–2 %

Technical specifications

3-point bending strength	750–1,100 MPa
Coefficient of thermal expansion	10.1 10 ⁻⁶ K ⁻¹
Translucency	45–49 %
Hardness	1,255 HV10
E-module	214–217 GPa

Indications

Fully anatomical crowns and bridges with up to 14 units and up to two pontics
Crowns and bridge frames for partially and fully veneered solutions with up to 14 units and up to two pontics
CadAbut Duo (Two-piece abutments)
Dentin core crowns and bridges according to Josef Schwaiger (Patent: EP2363094B1/DE102010002484B4)

* This symbol is a commercial designation/registered trademark of a company which is not part of the BEGO company group. Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.



KATANA* Zirconia UTML

Ultra translucent zirconium dioxide with color gradation for natural aesthetics in the anterior region

- Ideal for restorations in the anterior region
- Above-average translucency for natural aesthetics
- 4 layer Multicolor with flowing layer transition
- Available in 16 VITA* classical shades A-D
- Multicolor for monolithic restorations and microveneering
- Anterior bridge frames up to 3 units with one pontic

Product details

Chemical composition

Zirconium dioxide (ZrO ₂) & Hafnium oxide (HfO ₂)	87–92 %
Yttrium oxide (Y ₂ O ₃)	8–11 %
Other oxides and pigments	0–2 %

Technical specifications

3-point bending strength	557 MPa
Coefficient of thermal expansion	9.7 10 ⁻⁶ / K ⁻¹
Translucency	43 %
Hardness	1,280 HV10
E-module	214–217 GPa

Indications

Fully anatomical crowns and bridges with up to 3 units and up to one pontics in the anterior region
Crowns and bridge frames for partially veneered solutions with up to 3 units and up to one pontics in the anterior region
Inlays, onlays, partial crowns and veneers

* This symbol is a commercial designation/registered trademark of a company which is not part of the BEGO company group. Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.



IPS e.max* CAD

Lithium disilicate for restorations with natural aesthetics and strength

- High-strength lithium disilicate glass ceramic with an end strength 360 MPa
- Three degrees of translucency with up to 16 shades for highly aesthetic results
- Crystallization and glaze firing in one step – efficient and cost-effective at the same time
- Excellent aesthetics with optional individualization
- Years of clinical experience and millions of restorations placed
- **Please note:** The color of the precrystallized MO blanks is different from that of the HT and LT blanks. This is normal and has no influence on the final result



Detailed information and the instructions for use can be found at:
<http://www.ivoclarvivadent.com/en/download-center/>

Product details

Chemical composition

SiO ₂	57.0–80.0 %
Li ₂ O	11.0–19.0 %
K ₂ O	0.0–13.0 %
Other oxides	0–8 %

Physical material data

Coefficient of thermal expansion (100–400 °C)	10.15 ± 0.4 10 ⁻⁶ K ⁻¹
Coefficient of thermal expansion (100–500 °C)	10.45 ± 0.4 10 ⁻⁶ K ⁻¹
Flexural strength (biaxial)	≥ 360 MPa
Density	2.5 ± 0.1 g/cm ³

Indications

Single crowns (delivered in blue, precrystallized state)
Partial crowns, inlays, onlays, and veneers (delivered in blue, precrystallized state)
Three-unit bridges up to second premolar as terminal abutment (delivered in blue, precrystallized state)
Two-piece abutments for BEGO Semados® implants

* This symbol is a commercial designation/registered trademark of a company which is not part of the BEGO company group.
 Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.



VarseoSmile® Crown plus

The tooth-colored, ceramic filled hybrid material for 3D printing of permanent single crowns, inlays, onlays and veneers

- Easy to grind and polish by using standard tools
- Seven shades according to the proven VITA* classical shades: A1, A2, A3, B1, B3, C2, D3, BEGO Bleach BL
- Individualization of the objects is possible with composite stains
- Fluorescence of the printed objects resembles that of the natural tooth
- Antagonist-friendly material with mechanical buffering effect – ideal for implant-supported crowns
- Extensive scientific studies by renowned universities and institutes confirm the excellent features of the restorations made of VarseoSmile® Crown plus
- Excellent aesthetics thanks to a balanced ratio of opacity and translucency
- Low tendency to age and discolor thanks to very low water absorption
- Minimized formation of secondary caries thanks to a high adhesive bond with luting composites

Product details

Technical specifications

Color	A1, A2, A3, B1, B3, C2, D3, BEGO Bleach BL
Density	approx. 1.4–1.5 g/cm ³
Viscosity	2,500–6,000 mPas
Layer thickness	50 µm
Flexural strength	116–150 MPa**
Modulus of elasticity	4,090 MPa
Hardness	≥ 90 Shore D
Water solubility	< 1 µg/mm ³
Water sorption	< 12 µg/mm ³

Indications

Single crowns, inlays, onlays, veneers and smart veneering
--

* This symbol is a commercial designation/registered trademark of a company which is not part of the BEGO company group.
 ** See survey Scientific Studies "Effects of Additional UV Light Curing Processing" under www.bego.com
 Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.



VarseoSmile® TriniQ®

The tooth-colored, ceramic filled hybrid material for 3D printing of permanent crowns and bridge restorations, inlays, onlays, veneers and prosthetic teeth

- Easy to grind and polish by using standard tools
- Eight shades according to the proven VITA* classical shades: A1, A2, A3, A3.5, B1, B2, C2, D3
- Individualization of the objects is possible with composite stains
- VarseoSmile® TriniQ® exhibits wear behaviour similar to lithium disilicate and is antagonist-friendly at the same time. It is therefore not only durable, it also blends in perfectly with the natural tooth structure
- The easy combination and repair with common composites increases the long-term stability of the restorations and optimizes your treatment flexibility
- Extensive scientific studies by renowned universities and institutes confirm the excellent features of the restorations made of VarseoSmile® TriniQ®
- Excellent aesthetics thanks to a balanced ratio of opacity and translucency
- Low tendency to age and discolor thanks to very low water absorption
- The high bond strength of VarseoSmile® TriniQ® with common adhesive cements ensures secure placement and long durability of the restorations



Product details

Technical specifications

Color	A1, A2, A3, A3.5, B1, B2, C2, D3
Density	ca. 1.4–1.5 g/cm ³
Flexural strength	120 MPa
Modulus of elasticity	3,600 MPa
Water solubility	0.23 µg/mm ³
Water sorption	3.6 µg/mm ³

Indications

Single crowns
Bridges with up to 3 units and up to one pontics
Inlays, onlays, veneers
Prosthetic tooth
Smart Veneering



* This symbol is a commercial designation/registered trademark of a company which is not part of the BEGO company group. Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.

Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.



BEGO PMMA Multicolor

High-performance PMMA with color gradient for temporary restorations

- Production of aesthetically pleasing and cost-effective long-term restorations
- The multi-color design has been adapted to the color gradient of natural teeth
- Very good fracture resistance and flexural strength
- Abrasion- and color-stable
- Can be veneered with commercially available veneering composites
- Resistant to deposit formations and easy to clean

Technical data

Chemical composition

Acrylic polymer methacrylate (PMMA)	≥ 82–86 %
Silicium dioxide	14–17 %
The concentration of all pigments is	< 1 %

Material data

Elastic modulus	approx. 2,800 MPa
Flexural strength	> 80 MPa
Water absorption	corresponds to DIN EN ISO 10477
Solubility	corresponds to DIN EN ISO 10477

The technical/physical values given are typical measurement results and refer to samples produced in-house and the measuring instruments. Other measurement results may be obtained if the samples are manufactured differently and with other measuring instruments.

Shade overview BEGO PMMA Multicolor M01–M03



Correspondence of BEGO PMMA Multicolor M01–M03 to VITA® classical shade system

A1	A2	A3	A3,5	A4	B1	B2	B3	B4	C1	C2	C3	C4	D2	D3	D4
M01	M01	M02	M02	M02	M01	M01	M02	M03	M02	M02	M03	M03	M01	M03	M03

Product details

Indications

- Crowns and bridges with up to two pontics
- Two-piece abutments
- Two-piece individual healing posts



* This symbol is a commercial designation/registered trademark of a company which is not part of the BEGO company group. BEGO PMMA Multicolor corresponds to VITA® CAD-Temp®. Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.



Wirobond® C+

Cobalt-chrome restorations produced with the SLM method

- Optimal material characteristics of a cobalt-chrome alloy
- The SLM (Selective Laser Melting) procedure guarantees a homogeneous and extremely dense structure for secure ceramic veneering with commercially available dental ceramics (with the corresponding coefficient of thermal expansion)
- Controlled manufacturing process – for stress-free frames and outstanding accuracy of fit
- Nickel- and beryllium-free – no cytotoxic or allergic potential

Product details

Chemical composition

Co 63,9 % · Cr 24,7 % · W 5,4 % · Mo 5,0 % · Si · 1,0 %

Technical properties

Type (according to ISO 22674)	5
Density	8.6 g/cm ³
0.2 % elongation limit (R _{p0,2})	1,000 MPa
Tensile strength (R _m)	1,315 MPa
Modulus of elasticity	228 GPa
Solidus temperature; liquidus temperature	1,390; 1,425 °C
Coefficient of thermal expansion (25–500 °C)	14.0 10 ⁻⁶ K ⁻¹

Indications

Frames for partially and fully veneered restorations with up to 16 units and up to four pontics
Fully anatomical crowns and bridges with up to 16 units and up to four pontics
Two-piece abutments
C&B tertiary frame
Retention per segment



Wirobond® M+

Milled cobalt-chrome restorations

- The simultaneous 5-axis milling guarantees optimal precision of fit – with every unit
- Each milling disc is re-densified – for a dense, high-lustre finish and more than 99% freedom from porosity
- High strength in all span sizes – therefore a very wide range of indications
- Can be veneered with commercially available ceramics (with a corresponding coefficient of thermal expansion)
- Corrosion-resistant and biocompatible
- Nickel- and beryllium-free

Product details

Chemical composition

Co 63.8 % · Cr 24.8 % · W 5.3 % · Mo 5.1 % · Si 1.0 %

Alloy characteristics

Type (according to ISO 22674)	4
Density	8.3 g/cm ³
Modulus of elasticity	233 GPa
0.2 % elongation limit (R _{p0,2})	415 MPa
Tensile strength (R _m)	965 MPa
Hardness (HV 10)	290
Coefficient of thermal expansion (25–500 °C)	14.3 10 ⁻⁶ K ⁻¹

Indications

Frames for partially and fully veneered restorations with up to 16 units and up to four pontics
Fully anatomical crowns and bridges with up to 16 units and up to four pontics
One-piece abutments, bars, and occlusally screw-retained bridges

Extras

Abutments with fully anatomical form



BeCe® Cast

Milled frames out of plastic for casting in the laboratory

- Simple and fast CAD modeling
- Use of residue-free combustible and dimensionally stable plastic – ideal for investing and casting in your laboratory
- Filigree occlusal surfaces and the highest precision due to High Speed Cutting (HSC)
- Smooth surfaces for best casting results

Product details

Indications

Individual copings and bridges from plastic which burns out completely (only available for BEGO precious alloys customers)



CAD/Cast®

Cast restorations based on CAD data

- Diverse range of precious-metal alloys
- Not necessary to store cost-intensive precious-metal alloys in the laboratory
- The cost-effective combination of digital design and conventional casting technique
- Only actual consumption calculated – particularly cost-effective

Product details

CAD/Cast® alloys

AuroLloyd® KF	BegoStar®	PlatinLloyd® 100
BEGO EcoLine AU	BegoStar® LFC	PlatinLloyd® M
BEGO EcoLine K	Bio PlatinLloyd®	Pontonorm
BEGO EcoLine LFC	Bio PontoStar®	PontoLloyd® G
BegoPal® 300	Bio PontoStar® XL	PontoLloyd® P
BegoPal® S	ECO d'OR	


Indications

Frames for partially and fully veneered solutions with up to seven units

Fully anatomical crowns and bridges with up to 7 units and up to four pontics

Selected BEGO precious alloys

At the respective day rate; please request the latest price (Tel. +49 421 2028-220)

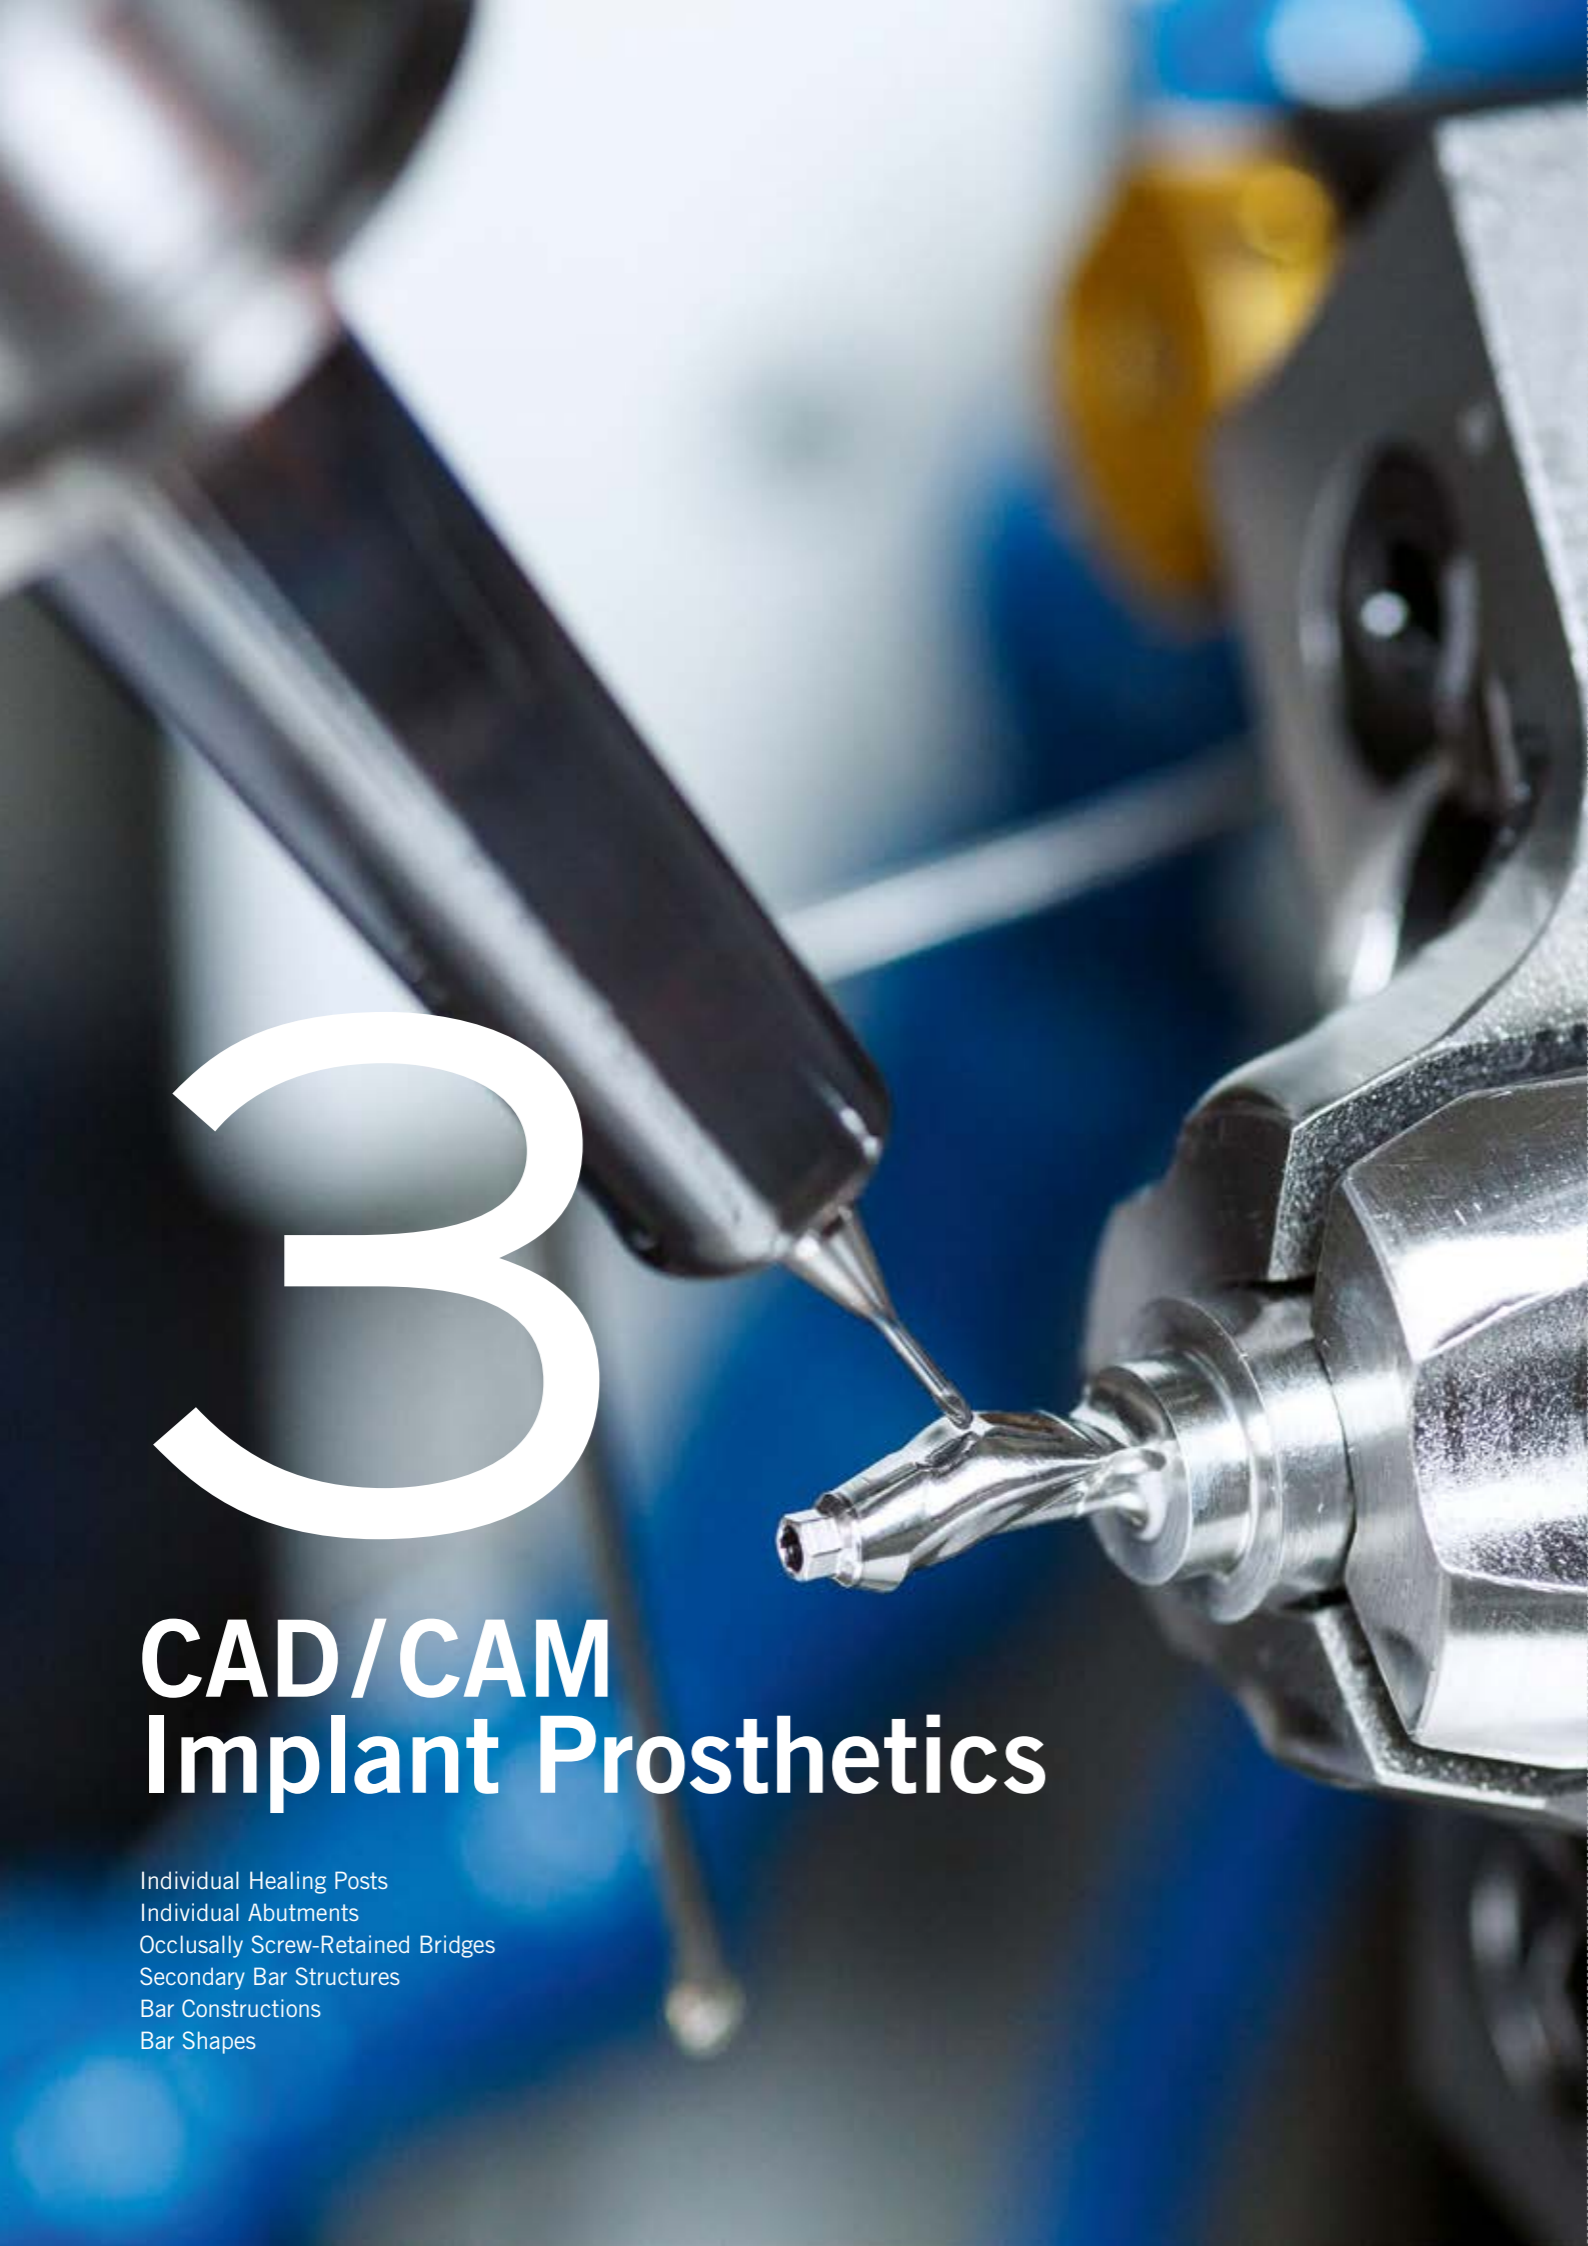

CAD/CAM Implant Prosthetics

- Individual Healing Posts
- Individual Abutments
- Occlusally Screw-Retained Bridges
- Secondary Bar Structures
- Bar Constructions
- Bar Shapes

Detailed product information:



Individual Healing Posts

Patient-specific soft tissue management for maximum aesthetics

- Optimal emergence profile for highly aesthetic anterior solutions
- Suitable for both one- and two-stage procedures
- Available in BEGO Titan Grade 5* (can be sterilized) or BEGO PMMA Multicolor* together with a titanium adhesive abutment and a prosthesis screw

BEGO CADAbut Full – one-piece individual healing posts including prosthesis screw**

Material

BEGO Titan Grade 5



BEGO CADAbut Duo – two-piece individual healing posts (with additional titanium adhesive abutment)**

Material

BEGO PMMA Multicolor
Available in three shades (M01, M02, M03)



* More information can be found in chapter "Crown and Bridge Prosthetics" starting on page 7.

** For availability see www.bego.com

Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.



Individual Abutments

One- and two-piece abutments for various implant systems

- Reliable and durable restorations thanks to excellent stability and high strength
- Dynamic fatigue testing as defined by ISO 14801
- Range of indications from screw-retained single-tooth restorations to cement-retained crowns and bridge solutions
- Individual, patient-specific emergence profile ensures optimal soft tissue management
- An optional angled screw channel can be individually selected for 0°–20° to the implant position – for an optimal occlusal exit of the screw channel in the anterior and posterior region
- Only certified biocompatible materials* – verified by external institutes

BEGO CADAbut Full – one-piece individual abutments including prosthesis screw**

Material	Product designation
Wirobond® MI+	
	Angled screw channel 0°–20°
BEGO Titan Grade 5	
	Angled screw channel 0°–20°
Extras	
Fully anatomical form	
Screwdriver for prosthetic screw	Angled screw channel DYNAMIC ABUTMENT*** screwdriver L24 Note: Angled screw channel DYNAMIC ABUTMENT is not compatible with BEGO PS CAD/CAM titanium base!



* More information can be found in chapter "Crown and Bridge Prosthetics" starting on page 7.
 ** For availability see www.bego.com
 *** This symbol is a commercial designation/registered trademark of a company which is not part of the BEGO company group.
 Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.

BEGO CADAbut Duo – two-piece individual abutments (with additional titanium adhesive abutment)*

Material**	Info
BEGO Zirkon LT	Available in five shades (LT01–LT05) Note: for BEGO Semados® implants, the CADAbut Duo with titanium base PS CAD/CAM is also available with an up to 25° angled screw channel. Please note the appropriate required screwdriver!
BEGO Zirkon ST Multi	Available in 16 VITA*** classical shades Note: for BEGO Semados® implants, the CADAbut Duo with titanium base PS CAD/CAM is also available with an up to 25° angled screw channel. Please note the appropriate required screwdriver!
VITA YZ® ST ^{Color}	Available in 16 VITA classical shades A-D Note: for BEGO Semados® implants, the CADAbut Duo with titanium base PS CAD/CAM is also available with an up to 25° angled screw channel. Please note the appropriate required screwdriver!
VITA YZ® ST ^{Multicolor}	Available in 16 VITA classical shades A-D Note: for BEGO Semados® implants, the CADAbut Duo with titanium base PS CAD/CAM is also available with an up to 25° angled screw channel. Please note the appropriate required screwdriver!
KATANA*** Zirkonia YML	Available in 13 VITA classical shades A-D Note: for BEGO Semados® implants, the CADAbut Duo with titanium base PS CAD/CAM is also available with an up to 25° angled screw channel. Please note the appropriate required screwdriver!
IPS e.max*** CAD	<ul style="list-style-type: none"> • Delivered in blue, precrystallized state • LT available in the 16 VITA classical shades • MO available in five opaque shades <p>Please note: For BEGO Semados® implants SC/SCX/RS/RSX/RI with Platform Switch Design. Angled screw channels are not available for e.max CAD.</p>
Wirobond® C+	Note: for BEGO Semados® implants, the CADAbut Duo with titanium base PS CAD/CAM is also available with an up to 25° angled screw channel. Please note the appropriate required screwdriver!
BEGO PMMA Multicolor	<ul style="list-style-type: none"> • Available in three shades (MO1, MO2, MO3) • For temporary use only up to one year <p>Note: for BEGO Semados® implants, the CADAbut Duo with titanium base PS CAD/CAM is also available with an up to 25° angled screw channel. Please note the appropriate required screwdriver!</p>

Extras

Screwdriver for angled screw channels up to 25° for BEGO Semados® CADAbut Duo restorations with PS CAD/CAM titanium base	BEGO Semados® screwdriver L24 for CADAbut Duo with BEGO Semados® PS CAD/CAM titanium base. Not compatible with DYNAMIC*** ABUTMENT screwdriver or ELOS*** Hexalobular screwdriver.
--	---

Now supported by ELOS premium adhesive titanium abutments with 25° angulates screw channel and titanium nitride coating



* For availability see www.bego.com
 ** More information can be found in chapter "Crown and Bridge Prosthetics" starting on page 7.
 *** The following symbols and VITA YZ® ST^{Color}/VITA YZ® ST^{Multicolor} are commercial designations / registered trademarks of companies which, with the exception of BEGO Implant Systems (Semados®), are not part of the BEGO company group.
 Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.



Occlusally Screw-Retained Bridges

Screw-retained implant bridges made of zirconium dioxide or cobalt-chrome

- Wide range of indications such as anatomically reduced bridge frameworks for direct veneering, thimble bridges, or frameworks for screw-retained plastic prostheses
- Different materials* available (metal, PMMA or zirconia adhesive bridges)
- Screw connection allows removal under certain conditions for repair - thus simple repair possibility
- Optional angled screw channel from 0° to 20° to the implant position individually selectable – for an optimal occlusal exit of the screw channel in the anterior and posterior region
- Either at implant or abutment level – great flexibility

BEGO CADBase Implantat Niveau / Abutment Niveau – one-piece individual bridge constructions including prosthesis screw**

Material	Product designation	Units
BEGO Titan Grade 5	Occlusally screw-retained bridges / bridge frameworks	2–4 5–7 ≥ 8
	Angled screw channel 0°–20°	
	Pontic / bridge frames	
Wirobond® M+	Occlusally screw-retained bridges/ bridge frameworks	2–4 5–7 ≥ 8
	Angled screw channel 0°–20°	
	Pontic / bridge frames	
Screwdriver for prosthetic screw	Angled screw channel DYNAMIC ABUTMENT*** screwdriver L24 Note: Angled screw channel DYNAMIC ABUTMENT is not compatible with BEGO PS CAD/CAM titanium base!	



* More information can be found in chapter "Crown and Bridge Prosthetics" starting on page 7.
 ** For availability see www.bego.com
 *** This symbol is a commercial designation/registered trademark of a company which is not part of the BEGO company group.
 Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.

BEGO CADAbut Duo without rotation protection – two-piece individual bridge construction (with additional titanium adhesive abutment)*

Material	Info	Product designation	Units	
BEGO Zirkon LT	Bridge constructions for partial and full veneers with up to 16 units and up to two bridge elements. Available in five shades (LT01–LT05).	Occlusally screw-retained bridges / bridge frameworks	up to 16	
		Pontic / bridge frames	up to 2	
BEGO Zirkon ST Multi	Fully anatomical crowns and bridges, bridge frameworks for partial and full veneering with up to 16 units and up to two pontics. Available in 16 VITA** classical shades.	Occlusally screw-retained bridges / bridge frameworks	up to 16	
		Pontic / bridge frames	up to 2	
VITA YZ® ST ^{Color}	Bridge frames for partial and full veneers with up to 14 units and up to two pontics. 16 VITA classical A–D shades.	Occlusally screw-retained bridges / bridge frameworks	up to 14	
		Pontic / bridge frames	up to 2	
				Picture similar
VITA YZ® ST ^{Multicolor}	Fully anatomical crowns and bridges, bridge frames for partially and fully veneered solutions with up to 14 units and up to two pontics. 16 VITA classical A–D shades.	Occlusally screw-retained bridges / bridge frameworks	up to 14	
		Pontic / bridge frames	up to 2	
				Picture similar
KATANA** Zirconia YML	Fully anatomical crowns and bridges, bridge frames for partially and fully veneered solutions with up to 14 units and up to two pontics. 13 VITA classical A–D shades.	Occlusally screw-retained bridges / bridge frameworks	up to 16	
		Pontic / bridge frames	up to 2	
				Picture similar
BEGO PMMA Multicolor	Only for temporary long-term bridge restorations with up to 2 pontics span and a clinical wearing time of up to one year. year (M01, M02, M03).	Occlusally screw-retained bridges / bridge frameworks	up to 16	
		Pontic / bridge frames	up to 1	
Wirobond® C+	Bridge constructions for partial and full veneers with up to 16 units and up to four bridge elements.	Occlusally screw-retained bridges / bridge frameworks	up to 16	
		Pontic / bridge frames	up to 4	
	Fully anatomical bridge construction with up to 16 units and up to four bridge elements.	Occlusally screw-retained bridges / bridge frameworks	up to 16	
		Pontic / bridge frames	up to 4	

Extras

Screwdriver for angled screw channels up to 25° for BEGO Semados® CADAbut Duo restorations with PS CAD/CAM titanium base

BEGO Semados® screwdriver L24 for CADAbut Duo with BEGO Semados® PS CAD/CAM titanium base. Not compatible with DYNAMIC*** ABUTMENT screwdriver or ELOS*** Hexalobular Screwdriver.



* For availability see www.bego.com
 *** This symbol is a commercial designation/registered trademark of a company which is not part of the BEGO company group.
 Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.



Secondary Bar Structures

Stress-free secondary bar construction made of cobalt chrome in SLM method

- Possibility of freely modeling the outer bar surfaces – choose between pin, hole, and bead retentions
- Stress-free fit thanks to SLM method, additional retaining elements (Ancora or Preci) ensure secure fit of prosthesis
- Supplied already sand-blasted – only minimal finishing required in the lab
- Time and cost savings

Secondary bar structures

Material

Wirobond® C+
incl. pin, hole, and/or bead retentions

Hybrid made of Wirobond® C+
incl. pin, hole, and/or bead retentions



Bar Constructions

Milled bars and bar abutments made of titanium or cobalt-chrome

- Exact fit thanks to highly accurate CAD/CAM production
- Stress-free position contributes to long-term success
- Shortened delivery time for unfinished bars
- Available in BEGO Titan Grade 5 or Wirobond® M+
- Biocompatibility examined by an independent institute and confirmed with a certificate
- **Please note:** "Unfinished" bars cannot be procured from the BEGO Scan and Design Center.

BEGO CADBase – bar abutments incl. prosthesis screws*

Material	Units
BEGO Titan Grade 5	2-4 5-7 ≥ 8
Angled screw channel 0° – 20°	
Wirobond® M+	2-4 5-7 ≥ 8
Angled screw channel 0° – 20°	



BEGO CADBar*

Material
BEGO Titan Grade 5
Wirobond® M+



* For availability see www.bego.com
Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.



Bar Shapes

Bar joints, bar attachments, additional retaining elements

Bar joint*

Indication: Implant-gingiva-supported removable prosthesis on at least two implants (without extensions)

Round bar 1.8 mm		
Horix* bar 1.8 mm		
Dolder* bar joint 2.3 mm		
Dolder bar joint 3.0 mm		

Bar attachments*

Indication: Implant-supported removable prosthesis on at least four implants (with extensions)

Dolder bar attachment 3.0 mm		
Customized bar shapes/attachments		

* For availability see www.bego.com

** The following symbols are commercial designations/registered trademarks of companies which, with the exception of BEGO Implant Systems (Semados®), are not part of the BEGO company group.

Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.

Additional retaining elements

Product designation	Available for
Rod attachment	<ul style="list-style-type: none"> Preci-Vertex* 1.8 mm Preci-Vertex* Crown Preci-Vertex* Bar
Tapped holes for retention elements	<ul style="list-style-type: none"> Zest Anchors* CEKA* attachment M2 CEKA attachment M3 CEKA attachment M2
Borehole elements	1.9–3.0 mm
Bar element	Horix bar element, 1.8 mm



Retention elements

Element

Dolder bar female part, palladium alloy

Contents

Resilience rail

Female part with retention for plastic

Material

Palladium alloy

available from Ceka-Vertrieb Deutschland, Akazienstraße 7A, 30169 Hanover, Germany
Tel. +49 511 8070041, www.cka-vertrieb.de



Female parts (Preci-Vertex rider/Preci-Horix* rider)

Female parts, dia. 1.8 mm, yellow, 1 unit = 6 pieces, (REF 1802)

Available from Ceka-Vertrieb Deutschland, Akazienstraße 7A, 30169 Hanover, Germany
Tel. +49 511 8070041, www.cka-vertrieb.de



* This symbol is a commercial designation/registered trademark of a company which is not part of the BEGO company group.

Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.



4

Partial Dentures

WIRONIUM® RP Partial Denture Frameworks
WIRONIUM® RP Complete
WIRONIUM® RP Hybrid Partial Denture Frameworks with outer telescopes



SLM
made

WIRONIUM® RP

SLM-made Partial Denture Frameworks

- The perfect combination of CAD and CAM
- Precisely fitting SLM-made partial dentures for upper and lower jaw
- High ductility of the material enables activation of the clasps as with cast components
- Further development of the casting alloy WIRONIUM®, which has been tried and tested for decades
- Delivery in blasted or high gloss polished condition
- Pore-free partial denture frameworks through industrial production process

Product details

Chemical composition

Co 66.2 · Cr 28.2 · Mo 5.5 · N < 1

Alloy characteristics

Density	8.5 g/cm ³
Modulus of elasticity	235 GPa
0.2 % elongation limit (R _{p0.2})	800 MPa
Tensile strength (R _m)	1,300 MPa
Ductile yield (A ₅)	13 %
Hardness (HV10)	395

Indications

Clasp retained partial dentures for upper and lower jaw, polished
Retentions for upper and lower jaw RPD-IFR, polished
Clasp retained partial dentures for upper and lower jaw, unpolished
Retentions for upper and lower jaw RPD-IFR, unpolished
Service Part, RPD-Rep, unpolished



Checklist Designing Partial Frameworks made of WIRONIUM® RP



NEW

WIRONIUM® RP Complete

SLM- made Partial Denture Frameworks, designed individually, manufactured in a modular system

- Precisely fitting SLM-made partial dentures for upper and lower jaw
- Delivery in blasted or high gloss polished condition
- Pore-free partial denture frameworks through industrial production process
- Fully digital design of partial denture frameworks, saddle sections and prosthetic teeth in exocad*
- Key features include the newly developed retention and pin geometry, which ensures high stability and reproducible processes in the dental laboratory and offers patients reliable functionality
- Convincing transition from framework to teeth and saddle sections thanks to holistic design in a single data set
- Validated workflow and secure material bond for digital partial dentures
- Use of premium high-impact 3D base material
- VarseoSmile® TriniQ®, the tooth-coloured, ceramic-filled hybrid material for 3D printing prosthetic teeth
- Combination of cost-effective SLM and 3D printing for high-precision fitting of individual components
- Efficient workflow through assembly of individual components in the dental laboratory

Product details

Scope of delivery

Partial denture framework base made of WIRONIUM® RP, 3D printed saddle components and prosthetic teeth

Technical characteristics

Partial denture framework	WIRONIUM® RP, blasted or polished
Saddle sections	Material: printodent® GR-14.2 denture HI* Color: orange/pink
Prosthetic teeth	Material: VarseoSmile® TriniQ®, Colors: A1; A2; A3; A3,5; B1; B2; C2; D3; OM1; OM3

WIRONIUM® RP Complete Workflow Tutorial:



Note:
Please note possible restrictions regarding CAD software:
exocad*: supported
3Shape*: not supported
Dentalwings*: not supported



WIRONIUM® RP Hybrid

SLM-made Partial Denture Frameworks with outer telescopes

- Precision-fit partial dentures with telescoping connection
- Save time and costs for joining partial denture and outer telescopes
- Telescopes and conical crowns with 0°–6°
- Set the telescope friction via the CAD design
- Supplied with slight underfitting to allow the friction to be individually adjusted
- Hybrid production using SLM (Selektive Laser Melting) and milling
- Delivery in high gloss polished or unpolished condition, according to request
- Pore-free partial denture frameworks through industrial production process

Product details

Chemical composition

Co 66.2 · Cr 28.2 · Mo 5.5 · N < 1

Alloy characteristics

Density	8.5 g/cm ³
Modulus of elasticity	235 GPa
0.2 % elongation limit (R _{p0.2})	800 MPa
Tensile strength (R _m)	1,300 MPa
Ductile yield (A ₅)	13 %
Hardness (HV10)	395

Indications:

- Partial dentures with double crowns for upper and lower jaw, polished
- Partial dentures with double crowns for upper and lower jaw, unpolished

Tutorial Partial Dentures hybrid manufacturing exocad



Tutorial Partial Dentures hybrid manufacturing 3Shape



Note:

Please note possible restrictions regarding the CAD software:
 exocad*: supported
 3Shape*: supported by workaround
 Dentalwings: not supported



CAD/CAM-Double Crowns

CAD/CAM-Double Crowns
 Secondary Structures from Hybrid Production

* The following symbols are commercial designations/registered trademarks of companies, which are not part of the BEGO company group. Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.



CAD/CAM Double Crowns

Milled and /or SLM-produced telescopic and conical crowns

- Defined fit of primary and secondary crown
- Selection of different production methods
- Free-form design including different retentions and supporting elements by SLM production
- Time advantage thanks to one-step procedure
- Choice between one- and two-step procedure
- **Please note:** Double crowns cannot be procured from the BEGO Scan and Design Center.

Product details

Indications

- Telescopic prostheses and bridges
- Extension of existing prostheses

Wirobond® M+ CAD/CAM double crowns

- Primary crown
- Secondary crown
- Secondary attachment



Wirobond® C+ CAD/CAM double crowns

- Primary crown
- Secondary crown
- Secondary crown (hybrid)
- Secondary attachment



Attachment mounts for secondary crowns made of Wirobond® C+

- TK1 friction element (MICROTEC®)
- TK-Soft (Si Tec®)
- TK-Soft Mini (Si Tec)



Retention per segment



* This symbol is a commercial designation/registered trademark of a company which is not part of the BEGO company group. User training is required prior to the first design of CAD/CAM double crowns. For further information and training dates, please contact your BEGO sales representative! Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.



Secondary Structures from Hybrid Production

Double crowns and secondary bar constructions with the advantages of the SLM and milling technology

- Hybrid production combines the advantages of the SLM-method (free-form design) with the advantages of the milling technique (precision fitting)
- Free-form design including different retentions and supporting elements
- Almost no follow-up work on milled inside surfaces of secondary construction

Product details

Wirobond® C+ secondary structures from hybrid production

- Hybrid secondary crown
- Secondary attachment

Attachment mounts for secondary crowns made of Wirobond® C+

- TK1 friction element (MICROTEC®)
- TK-Soft (Si Tec®)
- TK-Soft Mini (Si Tec)

Retention je Segment Retention per segment

Hybrid bar secondary structure including pin, hole, and/or bead retentions



Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.

Detailed product information:



Dentures

Digital Dentures



BEGO Digital Dentures

Printed high-impact denture bases with VITA* VIONIC VIGO®, the new generation of teeth for digital denture fabrication at the touch of a button for greater efficiency and flexibility

- Validated workflow and secure material bond
 - Use of premium high-impact 3D base material
 - Economical fabrication and great fit without manual post-processing
 - The new generation of teeth VITA* VIONIC VIGO® satisfies patients' wishes for customization, naturalness, and aesthetics
 - Efficient workflow for finalization in the dental laboratory thanks to the practical BEGO full denture set, made up of denture base, fixation material, and tooth sets selected specifically for the patient in terms of shape and shade
- BEGO Digital Dentures with VITA VIONIC®* SOLUTIONS
 - Enables highly efficient fabrication of full dentures with digital fabrication systems in five steps:
 1. Scan and digital model analysis
 2. Tooth selection and CAD design of try-in as well as denture base
 3. Fabrication of the try-in
 4. Fabrication of the denture base
 5. Teeth insertion/finalization
 - Provides, for the process-reliable production, a holistic material ecosystem with digital denture teeth, bonding solutions, as well as try-in and denture bases

Product details

Scope of delivery

Complete 28-set: 2x printed base, VITA VIONIC® VIGO tooth sets, VITA VIONIC® Bond

Technical characteristics

Base color (material: printodent® GR-14.2 denture HI*)	orange/pink
Try-in color (material: printodent® GR-21.1 Try-In*)	A2
Tooth shades (Material: VITA VIONIC® VIGO*)	OM1; A1; A2; A3; A3,5; B3; D3
Luting material VITA VIONIC® BOND*	Self-curing 2-component fixing system
Flexural strength of base	82 MPa
Flexural modulus of base	2.100 MPa
Water solubility of base	1,5 µg/mm³
Water absorption of base	≤ 24,8 µg/mm³

* This symbol is a commercial designation/registered trademark of a company which is not part of the BEGO company group. Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.

Detailed product information:



Available
from
December
2025



BEGO Splint E+

Milled thermoplastic occlusal splints with MSI® technology* and thermo-memory effect

- Very high wearing comfort thanks to thermoplastic flexibility
- Self-adjusting, extremely break-resistant material – adapts to tooth situation due to its thermo-memory effect
- Low minimum thickness
- Safe and reproducible production process thanks to CAD/CAM technology
- MSI® technology* for reducing biofilms
- Free from harmful plasticizers such as BPA / Bisphenol A

Product details

Chemical composition

Polyethylenemethacrylate, homopolymer	> 90 %
1,2-cyclohexane dicarboxylic acid diisononyl ester	< 10 %

Material data

Flexural strength (23 °C)	> 20 MPa
Flexural strength (37 °C)	< 20 MPa
Density	ca. 1,1 g/cm ³
Color	ocean-blue

Indication

Milled splints made of BEGO Splint E+



*MSI: Multi Species Inhibition
BEGO Splint E+ complies with pro3dure** THERMEO® I MSI

** This symbol is a commercial designation/registered trademark of a company that does not belong to the BEGO Group.
Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.

Splints

BEGO Splint E+
BEGO PMMA Splint E
BEGO PMMA Splint



BEGO PMMA Splint E

Milled thermoplastic occlusal splints

- Very high wearing comfort thanks to thermoplastic flexibility
- Self-adjusting, extremely break-resistant material – adapts to tooth situation
- Low minimum thickness
- Safe and reproducible production process thanks to CAD/CAM technology
- Free from harmful plasticizers such as BPA/Bisphenol A

Product details

Chemical composition


Poly(m)ethylacrylate and cross-linking copolymers of methacrylic acid	> 90 %
1.2-cyclohexane dicarboxylic acid diisononyl ester	< 10 %

Material data

Flexural strength (23 °C)	> 20 MPa
Flexural strength (37 °C)	< 20 MPa
Density	Approx. 1.1 to 1.2 g/cm ³
Color	Transparent

Indication

Milled splints made of BEGO PMMA Splint E

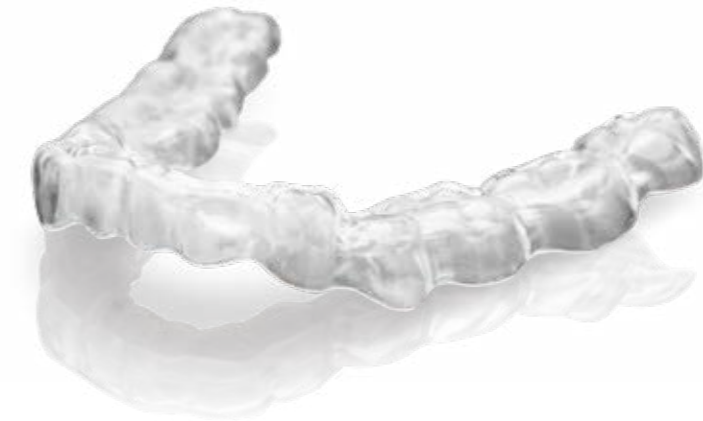

BEGO PMMA Splint

Milled occlusal splints

- Highly cross linked, filler-, fiber- and shrinkage-free PMMA with a low residual monomer content
- Outstanding fit
- Minimal post processing and polishing efforts
- Extension with ordinary PMMA-synthetic material
- Safe and reproducible production process thanks to CAD/CAM technology
- Free from harmful plasticizers such as BPA/Bisphenol A

Product details

Chemical composition

Polymethyl methacrylate	> 98 %
Methyl methacrylate	< 1 %
Dibenzoyl peroxide; benzoyl peroxide	< 1 %

Material data

Flexural strength	> 91.5 MPa
Flexural modulus	2,773 MPa
Density	1.19 g/cm ³
Color	Transparent

Indication

Milled splints made of BEGO PMMA Splint

Detailed product information:



8

Models

Model Production



Model Production

Digital model production using scan LED technology (SLT)

- Attractive look combined with optimal manufacturing precision and detail accuracy
- Particularly good feel
- Optimal processability

Product details

Models

- Full arch model, beige (upper + lower jaw)
- Quarter model, beige (upper + lower jaw)
- Removable dies, beige
- Elos PMA digital analog
- Gingiva mask, segment
- Gingiva mask, quarter
- Gingiva mask, full arch
- Orthodontic model, upper jaw
- Orthodontic model, lower jaw

Detailed product information:



Orthodontic Appliances

SLM-produced orthodontic auxiliaries

- Stress-free frames with outstanding accuracy of fit
- Biocompatible, nickel- and beryllium-free – no cytotoxic or allergic potential
- Homogeneous and dense structure with outstanding corrosion properties
- Supplied already sand-blasted – only minimal finishing required in the lab
- Time and cost savings

Product details

KFO-Apparaturen aus Wirobond® C+

Connecting element
 Retainer (fixed or removable)
 Band elements for Herbst appliances
 Palatal expansion

Orthodontic Appliances

Orthodontic Appliances

Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.

Detailed product information:



Order Options

Your order options for CAD/CAM restorations from BEGO

Order options for BEGO CAD/CAM restorations

	Scan	Design	Production
1a 1b Transmission of wax-up data	Your laboratory	Your laboratory	BEGO
2 Transmission of model scan data	Your laboratory	BEGO	BEGO
3 Shipment of models	BEGO	BEGO	BEGO

For more information, please visit www.bego.com.

1 Transmission of wax-up data

a) Data transmission from the BEGO system

With the BEGO System you have got the possibility to transmit your data from the design software. This allows you to send your designed restorations from your system to our production centre conveniently with just one click of the mouse.

b) Data transmission in STL format via FileGenerator or the order portal

If you work with a scanner which delivers STL data, you can use the BEGO FileGenerator, which is available to download on our homepage, to transmit the data. For more information, please visit www.bego-medical.com/de/orderportal/.

2 Transmission of model scan data

It is also possible to transmit model scan data to our Scan and Design Centre from the BEGO System – without any investment costs for design software. Our expert team will design the restoration for you. Following consultation with you and your approval, BEGO then produces the restorations.

3 Shipment of models

After logging in to our Scan and Design Centre's user-friendly portal, in which you complete the job form, you can send us your model or have our courier service pick it up from your laboratory. We scan your model and design the required restorations based on your specifications. Before commencing production, we give you another chance to check and approve the design.

10

Service

Order Options
BEGOconnectApp
BEGO Further Education
General Information

* This symbol is a commercial designation/registered trademark of a company which is not part of the BEGO company group.

BEGOconnectApp

Real-time production status

Follow the real-time status of your BEGO crown, bridge, custom abutment or partial denture orders. The BEGO Connect App operates as a virtual window into the hightech production center of BEGO and can easily be installed via your BEGO customer support onto your desktop device.

After registering with the BEGO customer number and password, users can check whether their orders have been received by BEGO, are in data preparation or production, have been produced or already sent to the customer. Additionally, the app provides the opportunity to track the delivery status of the courier service provider.

BEGOconnectApp



Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.



BEGO Further Education

CAD/CAM par excellence – BEGO CAD/CAM courses for a successful future!

The digitalization of dental processes has resulted in fundamental changes to the dental working environment and demands ever more rapid adaptation to new technologies.

Whether you are a newcomer or an old hand, you can benefit from the know-how of our experienced CAD/CAM specialists and gain an insight into the wide spectrum of new possibilities which this technology offers in terms of materials and production processes.

Within the framework of the various courses you can train in scanning, virtual modeling and construction, amongst others.

We have set up fully equipped workstations and training facilities in Bremen, Germany and at other regional laboratory bases. Step into the future of customized prosthetics with BEGO Medical!

More information on our entire course program can be found at www.bego.com.



Pictures and illustrations are exemplary. Colors, symbols, design, and information on the labels and/or packaging shown may differ from reality.



General Information

Good to know

General information

User Support (for technical enquiries)		Contact and service (ordering service, invoicing queries)	
Service hours		Service hours	
Mon.–Thurs.	8:00 am – 5:00 pm	Mon.–Thurs.	8:00 am – 5:00 pm
Fri.	8:00 am – 4:00 pm	Fri.	8:00 am – 4:00 pm
Contact		Contact	
Telephone	+49 421 2028-200	Telephone	North Europe +49 421 2028-340 West Europe +49 421 2028-223 South Europe +49 421 2028-249 East Europe +49 421 2028-232
E-Mail	cadcam@bego.com	Fax	0800 23 46 46 5
		E-Mail	order.lab@bego.com

Delivery periods following transmission of data (when order received by 2 p.m.)*

Customized one-piece abutments	2 workdays
Screw-retained bridges and bar restorations made of Wirobond® and BEGO Titan	4 workdays
Crowns and bridges	2 workdays
Milled occlusal splint	2 workdays
Models (if the order is received by 2 p.m.)	4 workdays
SLM partial denture	2 workdays

Returns

If you are not satisfied with the goods you receive, please return them to the following address with a completed complaints form**:

BEGO Medical GmbH
User Support
Wilhelm-Herbst-Str. 1
28359 Bremen, Germany



* The specified delivery terms refer to workdays – weekends and national holidays are not included.
** The complaints form can be found in the CAD/CAM download centre at www.bego.com.

BEGO CUSTOMER SERVICE CENTER

Great service is done by great people, and that's what BEGO is all about. More than 40 specialists at the Customer Service Center at our headquarter in Bremen, Germany, will be happy to take care of your needs. From product information, order acceptance and application advice to help in case of technical challenges, we are glad to be at your service!

Orders/Inquiries

Implantology:

☎ +49 421 2028-240
✉ order.imp@bego.com

Lab Material & Equipment:

☎ +49 421 2028-220
✉ order.lab@bego.com

Spare Parts (Equipment):

☎ +49 421 2028-270
✉ hardware@bego.com

Digital Services

Guided Surgery:

☎ +49 421 2028-230
✉ guide@bego.com

Scan- and Design Center:

☎ +49 421 2028-210
✉ design@bego.com

CAD/CAM Advice:

☎ +49 421 2028-200
✉ cadcam@bego.com

3D Printing:

☎ +49 421 2028-280
✉ 3d@bego.com

Product & Application Advice

Implantology:

☎ +49 421 2028-260
✉ implantology@bego.com

CAD/CAM Advice:

☎ +49 421 2028-200
✉ cadcam@bego.com

Equipment:

☎ +49 421 2028-270
✉ hardware@bego.com

3D Printing & Lab Material:

☎ +49 421 2028-280
✉ material.lab@bego.com



Here, you find more information about our services:
<https://www.bego.com/service/>



REALLY. GOOD. INFORMED.



With BEGO eNews you are always up to date with the latest developments in CAD/CAM implant prosthetics!

Subscribe to our free BEGO Newsletter and always receive the latest overview of **BEGO interfaces and prosthetic components and CAD positioners**. We will keep you informed about our latest product information, useful tutorials, tips & tricks, interesting training courses and events as well as special offers and promotions.

Curious?

Sign up for our newsletter here:
<https://www.bego.com/news/subscription/>

Would you like to take a direct look at the current overviews?
Then simply scan the QR codes below with your smartphone.



Interface Overview



Overview Prosthetic Components
and CADPositioner

Latest information and tutorials

Information about the BEGO 3D printing system can be found on our website:
<https://www.bego.com/3d-printing/>

Additional helpful software tutorials can be found here:
<https://www.bego.com/media-library/tutorials/>

Sign up for our newsletter here:
www.bego.com/newsletter

Visit us also on the social media platforms



WWW.BEGO.COM



www.bego.com

BEGO Medical GmbH
Wilhelm-Herbst-Str. 1 · 28359 Bremen, Germany
Tel. +49 421 2028-200 · Fax+49 421 2028-174
E-Mail cadcam@bego.com · www.bego.com

Always want to have a look at all BEGO news?
Sign up for our newsletter here: www.bego.com/newsletter



Errors and changes excepted. Our deliveries of products and services are governed by our Standard Terms of Business (STB), which are available at any time at www.bego.com and will be sent upon request. Please note that not all our products and services are available throughout the world, depending on authorities' approvals. For more information, please consult your local BEGO representative.